

CDX-636


10 Disc CD Changer



- 8x Oversampling, 1-Bit D/A
- Super Suspension Shock Isolation
- 110-Disc Custom File Memory/CD TEXT
- CD-R Playback†
- Fast Change 10 CD Mechanism
- Controlled by any Sony UniLink Receiver
- 5 Step Adjustable Mount Angle
- XA-250 10-Disc Magazine

General	
Output Terminals	UniLink BUS Control Output (8 Pin) Analog Audio Output (RCA)
Current Drain	800 mA (CD playback); 800 mA (during loading or ejecting a disc)
Operating Temperature	-10° C to 55° C (14° F-131° F)
Dimensions (w/h/d)	Approx. 262 x 90 x 181.5 mm (10 ³ / ₈ x 3 ⁵ / ₈ x 7 ⁵ / ₁₆ in.)
Weight	Approx. 2.1 kg (4 lb. 10 oz.)
Supplied Accessories	Disc Magazine (XA-250) (1) Mounting Hardware (1 set) 5.5-meter UniLink BUS Cable (1) 5.5-meter RCA Pin Cord (1)

CD Player Section	
System	Compact Disc Digital Audio System
Frequency Response	10-20,000 Hz
Signal-to-Noise Ratio	94 dB
Wow and Flutter	Below measurable limit
Laser Diode Properties:	GaAlAs
Material	780 nm
Wavelength	Continuous
Emiss. Duration	Less than 44.6 uW
Laser Out Power	Measured at a distance of 200 mm from objective lens surface on Optical Pickup

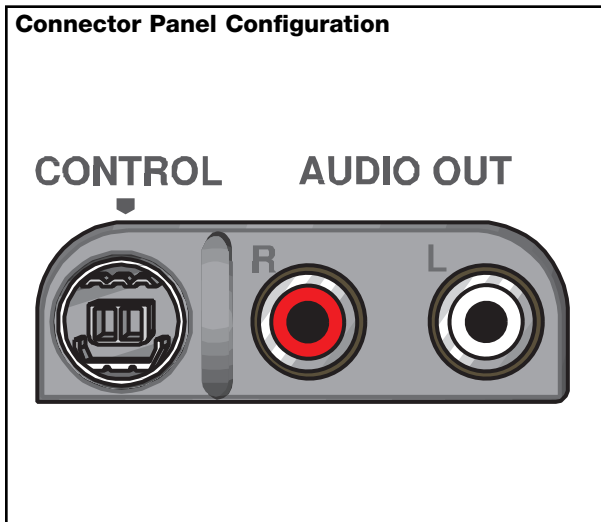

CDX-636

10 Disc CD Changer

