

STR-DE695

Receiver



Key Features

- ▲ 6 Channel Power Rating: 100W Per Channel x 6 (8 ohms 1 kHz, THD 0.7%)
- ▲ Dolby® Digital, Dolby® Digital EX, dts®, dts ES®, Dolby® Pro Logic® II Decoding
- 2 Component Video Inputs: HD Pass (80 MHz)
- Preprogrammed Remote Control
- Front Composite A/V Input
- 5.1 Multi-Channel Analog Input
- ▲ 3 Optical/1 Coaxial Digital Input
- ▲ S-Video In 3/Out 1 + Optical Digital Output



Additional Features

Amplifier Section

- Black Finish A/V Receiver
- 6 Channel Power Rating: 100 Watts Per Channel x 6 (8 ohms 1 kHz, THD 0.7%)
- Stereo Power Rating: 100 Watts Per Channel x 2 (8 ohms 20 Hz-20 kHz, THD .09%)
- ▲ Dolby® Digital, Dolby® Digital EX, dts®, 96k/24 bit-dts ES®, Dolby® Pro Logic® II Decoding
- A & B / A or B Speaker Switch
- ▲ Surround Back Output for 6.1 Channel Audio
- 32-bit Dolby® Digital, Dolby® Pro Logic® and dts® decoder
- 32-bit DSP with 11 Acoustic Environments
- Digital Cinema Sound™ System with Cinema Studio EX Modes
- Sound Field Modes (Movie, Music, AFD, 2 Channel):
 - Movie: 3 Modes;
 - Music: 3 Modes;
 - AFD: 4 Modes;
 - 2 Channel: 1 Mode
- Station Presets: 30 Total
- Circuit Device (Discrete)
- Sound Field Link

Inputs and Outputs

- 2 Component Video Inputs: HD Pass 80 MHz
- Screw Terminals/Push Terminals for B Speaker Connections
- Multi-Channel IN (Analog) 5.1 Channel
- Headphone Jack 1/4" Jack
- Phono (mm)
- ▲ Control A 1 II
- Analog Audio Input x 3
- Analog Audio Output x 1
- Digital Audio Input x 4 (3 Optical, 1 Coaxial)

- ▲ Optical Audio Output x 1
- ▲ Pre-Out x 1 (Subwoofer)
- Composite Video Input x 4
- Composite Video Output x 1
- ▲ S-Video Input x 3
- ▲ S-Video Output x 1
- Component Video Input x 2 (HD Pass 80 MHz)
- Component Video Output x 1 (HD Pass 80 MHz)
- Monitor Out x 2 (1 Composite, 1 S-Video)
- AC Outlet (switched) x 1

Convenience Features

- ▲ Pre-Programmed Remote Control


▲ = Step-Up Feature

Preliminary and Confidential

SONY


TBD

Key Technology



Component Video Switching

2 Component Video Inputs, 1 Component Video Output
 HD Switching, 80 MHz Bandwidth
 Ensures Minimal Signal Loss

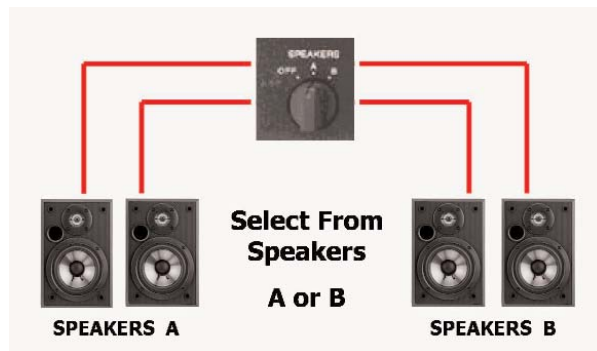

A/B Switching

Specifications

Specifications

Amplifier Section

- 6 Channel Power Rating: 100 Watts Per Channel x 6 (8 ohms 1 kHz, THD 0.7%)
- FM Tuning Range: 87.5 - 108 MHz
- AM Tuning Range: 530 - 1710 kHz
- Display Type (8 Seg.)
- Line Input S/N Ratio: 96 dB
- Frequency Response Line (CD): 10 Hz - 70kHz +.5 dB /-2 dB
- Line (CD) Input Sensitivity Impedance: 500mV/50 kohm
- Record Out Level Impedance: 500mV/10 k ohm

- Subwoofer Pre-Out Level Impedance: 2V/1 k ohm

Video Section

- Composite Video Input Sensitivity Impedance: 1 Vp-p/75 ohm
- S-Video (Y)/(C) Input Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (C) .286 Vp-p/75 ohm
- Component Video (Y/Pb/Pr) Input Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (Pb) .7 Vp-p/75 ohm; (Pr) .7 Vp-p/75 ohm
- Composite Video Output Sensitivity Impedance: 1 Vp-p/75 ohm

- S-Video (Y)/(C) Output Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (C) .286 Vp-p/75 ohm
- Component Video (Y/Pb/Pr) Output Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (Pb) .7 Vp-p/75 ohm; (Pr) .7 Vp-p/75 ohm

General

- Power Requirements: 120V AC, 60 Hz
- Power Consumption: TBD
- Power Consumption (Standby): 0.3 Watts

Accessories

Supplied Accessories

- Instruction Manual
- Remote Model: RM-PP412

Weights & Measures

- Approx. Dimensions (w/h/d): TBD
- Approx. Weight: TBD

UPC Code

- 027242618176