



STR-DE895/B STR-DE895/S

Receiver

Key Features

- ▲ 6 Channel Power Rating: 110W Per Channel x 6 (8 ohms, 1 kHz, THD 0.7%)
100W x 6 (8 ohms, 20Hz-20kHz, THD 0.09%)
- ▲ Dolby® Digital, Dolby® Digital EX, dts®, dts ES®, dts:Neo6®, Dolby® Pro Logic® II Decoding
- ▲ Assignable Digital Input
 - 2 Component Video Inputs: HD Pass (80 MHz)
- ▲ Preprogrammed/Learning/Macro Remote Control
- ▲ Front Composite A/V and Optical Input
- 5.1 and 6.1 Multi-Channel Analog Inputs

Additional Features

Amplifier Section

- Black Finish A/V Receiver (Also Available in Silver)
- ▲ 6 Channel Power Rating: 100 Watts Per Channel x 6 (8 ohms, 1 kHz, THD 0.7%)
- ▲ 6 Channel Power Rating: 90 Watts Per Channel x 6 (8 ohms, 20Hz-20kHz, THD 0.09%)
- ▲ Stereo Power Rating: 100 Watts Per Channel x 2 (8 ohms, 20 Hz-20 kHz, THD .09%)
- ▲ Dolby® Digital, Dolby® Digital EX, dts®, 96k/24 bit dts ES®, dts:Neo6®, Dolby® Pro Logic® II Decoding
- A & B/A or B Speaker Switch
- 32-bit Dolby Digital, Dolby Pro Logic and dts Decoder
- 32-bit DSP with 13 Acoustic Environments
- Digital Cinema Sound™ System with Cinema Studio EX modes

- Sound Field Modes (Movie, Music, AFD, 2 Channel):
Movie: 3 Modes
Music: 3 Modes
AFD: 6 Modes
2 Channel: 1 Mode
- Station Presets: 30 Total
- Analog Direct
- Circuit Device (Discrete)
- Sound Field Link

Inputs and Outputs

- ▲ Assignable Digital Inputs
- 2 Component Video Inputs: HD Pass 80 MHz
- Screw Terminals for A and Push Terminals for B Speaker Connections
- ▲ Control-S Input x 1
- Front S-Video & Composite A/V with Optical
- Multi-Channel In (Analog) 5.1 Channel & 6.1 Channel Input
- Headphone Jack ¼" Jack Gold Plated
- Phono (mm)
- Control A 1 II

- Analog Audio Input x 3
- Analog Audio Output x 1
- Digital Input x 5 (4 Optical, 1 Coaxial)
- Digital Output x 1 (Optical)
- Pre-Out x 1 (Subwoofer)
- Composite Video Input x 5
- Composite Video Output x 2
- S-Video Input x 3
- S-Video Output x 1
- Component Video Input x 2 (HD Pass 80 MHz)
- Component Video Output x 1 (HD Pass 80 MHz)
- Monitor Out x 2 (1 Composite, 1 S-Video)
- AC Outlet (Switched) x 2

Convenience Features

- ▲ Remote Commander Type: Pre-Programmed + Learn + Limited Macro
- Easy Setup - Expandable Menu System for Simplicity




▲ = Step-Up Feature

Preliminary and Confidential


SONY

STR-DE895/B STR-DE895/S


Receiver

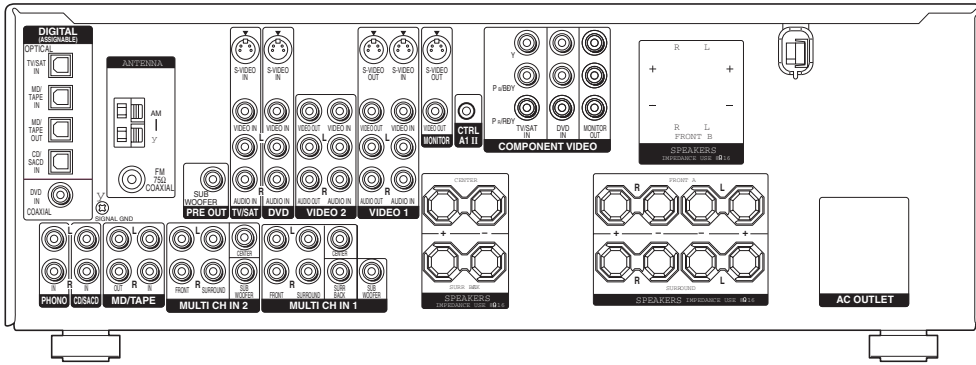

Key Technology

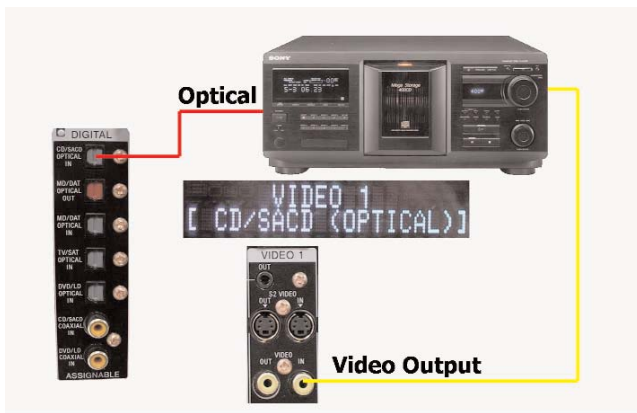

Assignable Digital Output

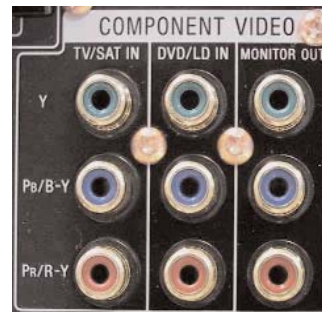

Component Video Switching

2 Component Video Inputs, 1 Component Video Output
HD Switching, 80 MHz Bandwidth
Ensures Minimal Signal Loss

Specifications

Specifications

Amplifier Section

- 6 Channel Power Rating: 110 Watts Per Channel x 6 (8 ohms, 1 kHz, THD 0.7%)
- 6 Channel Power Rating: 100 Watts Per Channel x 6 (8 ohms, 20Hz-20kHz, THD 0.09%)
- Stereo Power Rating: 100 Watts Per Channel x 2 (8 ohms, 20 Hz-20 kHz, THD .09%)
- FM Tuning Range: 87.5 - 108 MHz
- AM Tuning Range: 530 - 1710 kHz
- Display Type (Dot FL.)
- Phono Input S/N Ratio: 86 dB
- Line Input S/N Ratio: 96 dB
- Frequency Response Line (CD): 10 Hz - 100kHz ± 3 dB
- Phono Input Sensitivity Impedance: 8mV/50 kohm
- Line (CD) Input Sensitivity Impedance: 500mV/50 k ohm
- Record Out Level Impedance: 500mV/10 kohm
- Subwoofer Pre-Out Level Impedance: 2V/1 kohm

Video Section

- Composite Video Input Sensitivity Impedance: 1 Vp-p/75 ohm
- S-Video (Y)/(C) Input Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (C) .286 Vp-p/75 ohm

- Component Video (Y/Pb/Pr) Input Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (Pb) .7 Vp-p/75 ohm; (Pr) .7 Vp-p/75 ohm
- Composite Video Output Sensitivity Impedance: 1 Vp-p/75 ohm
- S-Video (Y)/(C) Output Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (C) .286 Vp-p/75 ohm
- Component Video (Y/Pb/Pr) Output Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (Pb) .7 Vp-p/75 ohm; (Pr) .7 Vp-p/75 ohm

General

- Power Requirements: 120V AC, 60 Hz
- Power Consumption: 265 Watts
- Power Consumption (Standby): 0.3 Watts

Accessories

Supplied Accessories

- Instruction Manual
- Remote Model: RM-PG411

Weights & Measures

- Approx. Dimensions (w/h/d): 17" x 6.2" x 14.5" (430 x 157.5 x 369mm)
- Approx. Weight: 21 lbs. (9.5 kg)

UPC Code

- Black: 027242618138
- Silver: 027242618145